



DEKORA

FACADE CONNECTOR







The concealed tongue and groove fixing protects the exterior surface from the effects of the weather and ensures optimum structural protection.

The chamfered locating guide facilitates installation and ensures smooth insertion and positioning of the cladding profile into the connector.

The connector compensates natural swelling movements of the cladding without any restrictions - swelling movements are absorbed by the integrated relief zones.

The cladding profiles are securely affixed to the substructure via the cladding connector using the provided system screw.

OVERVIEW		
Material:	Aluminium-zinc coated sheet metal	
	Aluminium-zinc coated sheet metal with additional C4 zinc flake coating black	
	System screw ELITA hardened stainless steel	
Fire rating:	Assured by metal connectors	
Fastening type:	Concealed sliding point fastening	
Façade profile:	Specific DEKORA profile	


DEKORA			
Description	PU	Prod. No.	
Alu Zinc	100 PCS	015005000	
Alu Zinc C4 black	100 PCS	015105000	











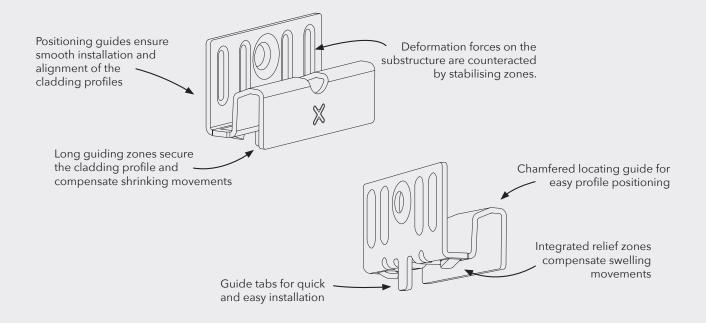

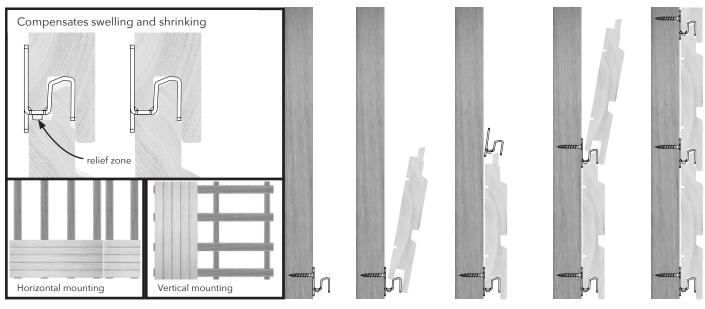



Maximum design flexibility.

DEKORA cladding profiles can be produced in a wide range of dimensions, wood species and surface finishes.

Local building regulations must be followed.

